

RCC OPTICAL ATTENUATORS

RCC offers a low back reflection, male to female, inline attenuator in 1 dB increments up to 10dB. All of the attenuators offered have Ceramic alignment sleeves.

APPLICATIONS


CATV
Local Area Network
Telecommunications
Video Transmission

SPECIFICATIONS

Wavelength: - 1310 – 1550 nm
Fiber Type: - Single mode 9/125 um
Insertion Loss: 1, 2, 3, 4, 5, 10dB
Insertion Loss Tolerances:
1-5 dB: +/- 1 dB
10 dB: +/- 1.5 dB
20 dB: +/- 3 dB

FEATURES

Low Insertion Loss
Low Back Reflection Loss
Easy Installation

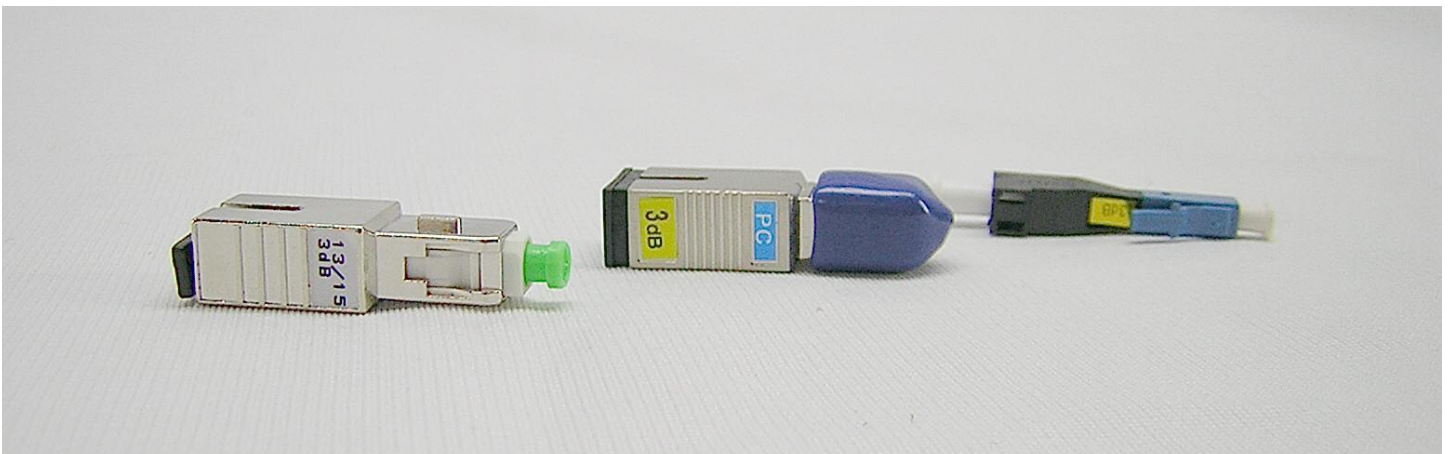

Fiber Optic Inline Attenuators

ATTENUATOR BUILD INFORMATION

