

Radiant Communications Corp

www.rccfiber.com (800) 969-3427

Rack 72 Series
Indoor Fiber Optic
Patch Panels



The Rack 72 Series indoor fiber optic patch panel is conveniently sized to handle a 72 fiber installation. The panel is available in all popular connector styles. Each item comes with an accessory kit to assist in cable management during the fiber in stallation.

OPTIONAL EQUIPMENT:

<u>Mounting brackets</u> – 19 inch brackets supplied are standard, 23 inch brackets can be substituted upon request.

<u>Fiber splice trays</u> - clear anodized aluminum with 12 fiber capacity in each tray.

<u>Splicing pigtails</u> – RCC can supply 72 fibers for splicing with each unit. 12 pcs of a 6 fiber, two meter length assembly

<u>Part Number Information</u> - Please see the build listing information section for further product listing information.

<u>Pricing Information</u> – Please contact Radiant for all pricing information.

BENEFITS

Front & rear access panels provide immediate access to the Patch Panel.

Unit can be configured for 19 inch or 23 inch Mounting Cabinets.


FEATURES

Heavy duty all metal patch panel with multi step paint processing

Dimensions: 17" wide x 13" deep x 5.25" height

Weight: 18 lbs



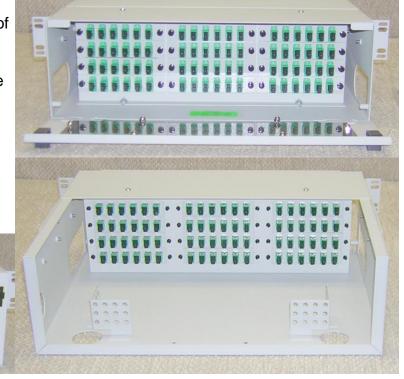

Rack 72 Series Indoor Fiber Optic Patch Panels



RACK 72 PATCH PANEL BUILD INFORMATION

PATCH PANEL IDENTIFIER

"R72" - 72 PORT RACK MOUNT UNIT

<u>AVAILABLE CONNECTION PORTS</u> - AVAILABLE IN 6 PC INCREMENTS C24, C48 OR C72 FOR 72 PORT RACK UNIT, <u>UP TO C144 FOR DUPLEX LC'S</u>

ADAPTOR TYPE TO BE INSTALLED

SINGLEMODE
"AZ" = SIMPLEX SCAF

"AZ" = SIMPLEX SCAPC
"BZ" = SIMPLEX FC

"EZ" = SIMPLEX SC "DZ" = SIMPLEX ST

"FZ" = SIMPLEX LC
"SZ" = SIMPLEX FCNAPC
"GZ" = SIMPLEX LCAPC

"DFZ = DUPLEX LC
"DGZ" = DUPLEX LCAPC

MULTIMODE

"DP" = SIMPLEX ST

"EP" = SIMPLEX SC "FP" = SIMPLEX LC

"DFP" = DUPLEX LC


"EPQ" = SIMPLEX SC AQUA "FPQ" = SIMPLEX LC AQUA

<u>OPTIONAL SPLICE TRAY (LEAVE BLANK IF NOT NEEDED)</u>

H48 = 4 PC EACH OF A 12 FIBER SPLICE TRAY W/ HEAT SHRINK CHIP H72 = 6 PC EACH OF A 12 FIBER SPLICE TRAY W/ HEAT SHRINK CHIP PLEASE NOTE THAT 72 FIBERS IS THE LIMIT FOR SPLICING IN THIS UNIT

OPTIONAL SPLICING PIGTAILS (LEAVE BLANK IF NOT NEEDED)

P48 = 8 PC OF A 2M LONG 6 FIBER PIGTAIL ASSEMBLY SUPPLIED P72 = 12 PC OF A 2M LONG 6 FIBER PIGTAIL ASSEMBLY SUPPLIED





To our left, we have a unit pictured to give an example of the unit with installed SCSM adaptors, along with the six optional splice trays installed.

The part number for the illustrated item would be R72C72EZ-H72

Additional fiber optic jumpers are available. Please contact Radiant for information.

Phone: 908-757-7444 or 800-969-3427

Fax: 908-757-8666

Email: sales@rccfiber.com